

VR1 EUROPEAN TRADITION HYDRONIC TOWEL WARMER

9 W Wds^

Provide MYSON VR1 EUROPEAN TRADITION hydronic towel warmer including accessories as scheduled. European Tradition towel warmers are made of 1-1/4" brass tube and fittings in a variety of finishes. TheVVR1 includes an integral white 3 column steel radiator core. The VR1 hydronic towel warmer is approved for installation on closed loop hydronic hot water systems only.


Each VR1 towel warmer is constructed with integral 3-1/4" diameter wall and floor mounting flanges that are welded onto the back and bottom. The towel warmers are equipped with a manual air vent. Every unit is factory filled, tested and inspected to insure the finest quality product.

3hS[/ST/W8] [eZWe,

Polished Chrome, Polished Nickel, Satin Nickel, Regal Brass, Oil-Rubbed Bronze, White Radiator core is: RAL9016 - White epoxy polyester powder coat

EfS` VSdV 5a`` WUf[a`s: 2 x internal thread G 1/2" BSP


Maximum positive operating pressure: 77psi Maximum operating temperature: 230° F

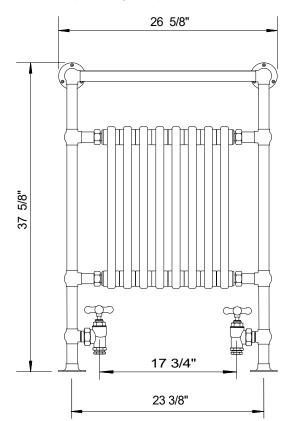

NOTE: Valve rough-in centers may vary from 181/2" - 19" depending on valve spud insertion depth.

Heat Output: 2520 BTUH @ 1550 F Entering Water Temperature

I WYZf, 50 lbs.

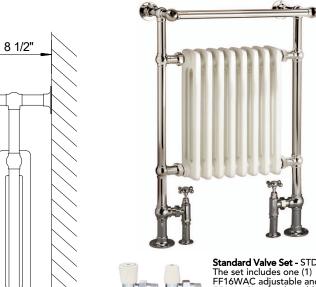

Standard Valve Set - STDVKIT The set includes one (1)
FF16WAC adjustable and (1)
FF16LAC) non-adjustable ½" valve. Available only with chrome angle body and white handles



Modern Valve Set - V16A "Angle" or V16S "Straight" pattern. Straight valves are normally used when the pipes come from the floor instead of the wall. Available in matching finishes.



Cross Handle Valve Set - CHV16 The set includes two (2) Cross Handle valves . The Cross Handle valves are only available in an angle pattern and are available in matching finishes.



Sleeve Kit - SK16 The set includes two (2) .656" I.D. x 3" brass sleeves and two (2) 2" diameter brass escutcheons. Available in matching finishes.

Optional valves and sleeve kits are recommended and available from MYSON.



SddS`fk,

MYSON European Tradition Towel Warmers are covered by a 10 year warranty.

Quality certificates

CE DIN EN 442 LOOP OZI NA PROJECT NAME: APPROVED DATE: ARCHITECT: ENGINEER: APPROVED SUBMITTED DATE:



4 1/2"